




# WICK® UF2



## TWO STAGE HIGH PRESSURE HIGH VOLUME FOAM COMPATIBLE PUMP

- Compact, high efficiency and superior reliability are the hallmarks of this pump
- Designed for use with our complete line of WICK ULTRAFLO® pumps
- Two stage hydraulics and modern engineering techniques have been combined resulting in high performance
- Standard sealed bearing
- Interchangeable with other common detachable pump end products
- Standard 3" / 76mm NPSH to NH adaptor on intake
- Designed for easy maintenance
- Applications for this pump are both Municipal and Wildland, where high pressures and high volumes are required, such as for fire fighting over long hose lays and elevation.

Performance standard correction as per SAE J1349; 60° F / 15.5° C; Baro 29.92 in. / 101.3 mB

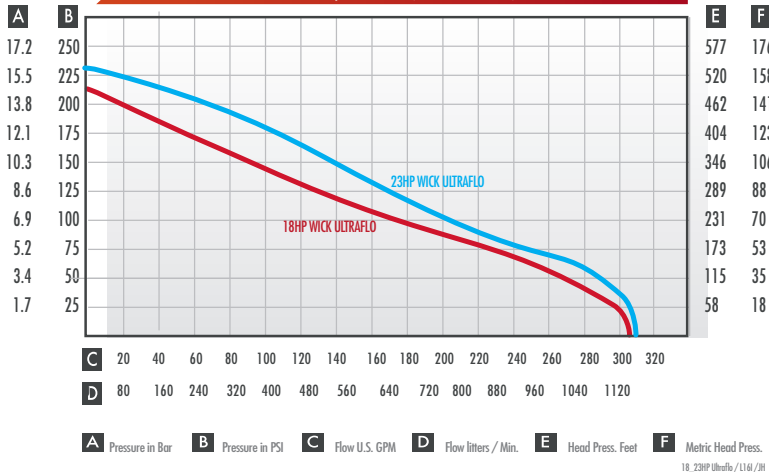

### WEIGHT & DIMENSIONS

Length	11.0"	28.0 cm
Width	9.1"	23.2 cm
Height	8.75"	22.2 cm
Weight*	13.2 lbs	6.0 kg
Suction	3.0" NPT	76 mm
Discharge	2.5" NH	64 mm

### PERFORMANCE

Performance indicated is obtained using our 18 and 23 HP Briggs & Stratton engines and a Hydro-Wick speed increaser

\*Weight without adaptors

Note: Specifications subject to change without notice

5838 Cypihot  
 Saint Laurent, QC  
 Canada, H4S 1Y5

Phone 514.335.4337  
 Phone 877.937.9660  
 Fax 514.335.9633

mercedestextiles.com  
 sales@mercedestextiles.com




# WICK<sup>®</sup> UF2

## BID SPECIFICATION

- The pump must be two stage with integral bearings and be able to attach to a speed increaser or engine by the use of a one-piece mounting clamp
- The pump must be cast from aluminum and be foam compatible
- The pump must be easily disassembled for maintenance
- The pump discharge must be equipped with a fitting to accommodate accessories such as a pressure gauge or primer pump
- The pump must come standard with 3" / 76mm NPSH to NH adaptor on the intake
- Must come standard with a sealed bearing
- The pump must have minimum flow and pressures as shown in the performance chart on the opposite page

## WICK UF2

Part#	Description
71FB225	Wick UF2 two stage high pressure, high volume pump end

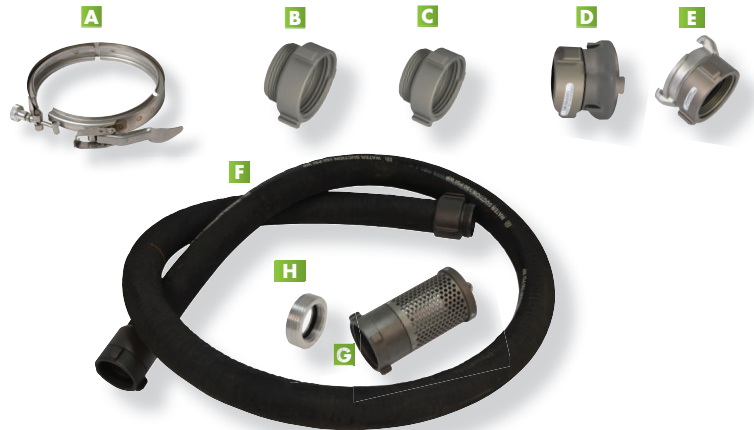

## ACCESSORIES

	Part#	Description
A	79W212	Pump Mounting Clamp
B1	6148NM48PF	Intake Adaptor 3" / 72mm NH Male x 3" / 76mm NPSH Female
B2	6148BSM48PF	Intake Adaptor 3" / 72mm BSP Male x 3" / 76mm NPSH Female
C1	6140NF40NM	Discharge thread protector 2 1/2" / 64mm
C2	6140NF40BM	Discharge Adaptor 2 1/2" / 64mm NH Female x 2 1/2" / 64mm BAT Male
C3	6140NF40CM	Discharge Adaptor 2 1/2" / 64mm NH Female x 2 1/2" / 64mm CSA Male
C4	6140NF40MM	Discharge Adaptor 2 1/2" / 64mm NH Female x 2 1/2" / 64mm NS Male
C5	6140NF40QM	Discharge Adaptor 2 1/2" / 64mm NH Female x 2 1/2" / 64mm QST Male
D	6140NF40RZ	Discharge Adaptor 2 1/2" / 64mm NH Female x 2 1/2" / 64mm Storz
E	6340NF40QCA	Discharge adaptor 2 1/2" / 64mm NH Female x 2 1/2" / 64mm QC
F	70FL30SHNH10-R	Ultraflo suction hose 3" / 76mm x 10' / 3M c/w NH
G	70FLFV64NF	Foot Valve / Strainer 4.0" / 102mm
H	70FLFV4450	Adaptor 4" / 102mm NH Male x 3" / 76mm NH Female